



c o m p a c t

powerful

Work in tight quarters

The low profile SG-R and S Series are specially equipped to handle the demands of the poultry industry. Poultry Coop Handlers have full lift capacity to maximum fork height to ensure operator safety, productivity and efficiency in the tightest quarters.

Exceptional performance is delivered from a high powered diesel engine coupled to a fully automatic transmission which increases productivity and reduces downtime.

All models are available in two- or four-wheel drive for excellent on-command traction.


poultry coop handlers



SELICK

Poultry coop handlers

Lift capacities @ 48" load centre

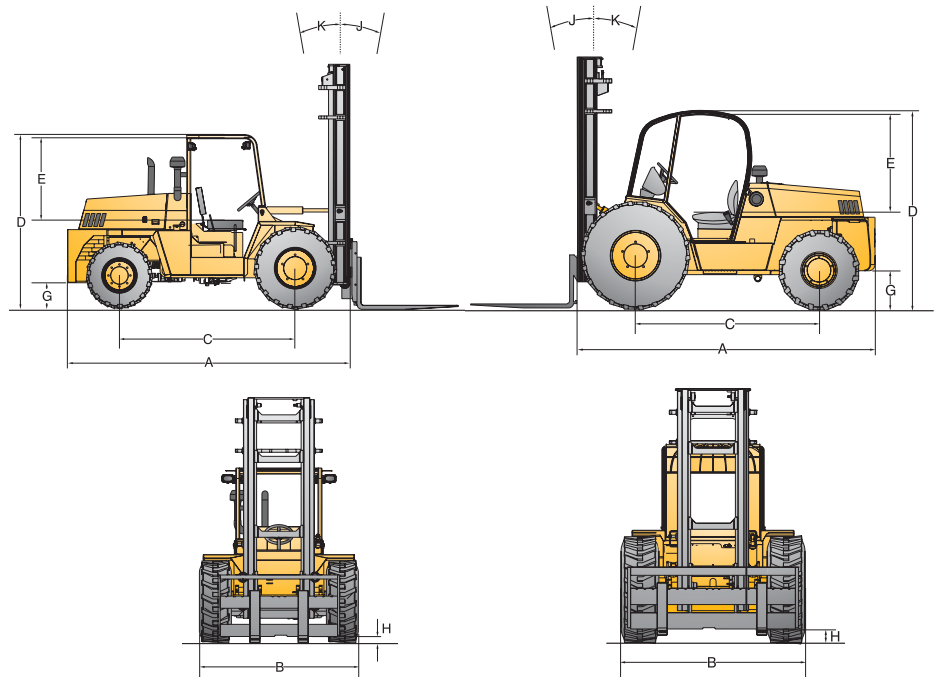

Optional equipment & attachments

Powershift automatic transmission

15° or 43° rotator carriages for pullet or broiler handling

Wide variety of forks

Model	Ref	SG-60R	S60
Lift capacities @ 48 inch load centre		3700 lbs	4200 lbs
Overall length (without forks)	A	141"/3581 mm	149"/3785 mm
Overall width	B	78"/1981 mm	89"/2261 mm
Wheelbase	C	87"/2210 mm	89"/2261 mm
Height to top of overhead guard (poultry)	D	75"/1905 mm	85"/2159 mm
Distance from seat to overhead guard (poultry)	E	39"/990 mm	40"/1016 mm
Outside turning radius		2WD: 168"/4267 mm 4WD: 178"/4521 mm	178"/4521 mm
Aisle width 90° stacking		2WD: 256"/6502 mm 4WD: 266"/6756 mm	266"/6756 mm
Frame underclearance	G	11"/279 mm	15"/381 mm
Mast underclearance	H	8"/203 mm	12"/305 mm
Mast sideshift		6"/152 mm	6"/152 mm
Mast tilt - forward	J	15°	45°
Mast tilt - rearward	K	10°	12°
Gradeability		25%	25%
Tire size type & size (standard)	Drive (pneumatic)	15 - 19.5 - 12 ply	15.5 x 25 - 12 ply
	Steer (pneumatic)	12 - 16.5 - 10 ply	14 x 17.5 -10 ply
Engine manufacturer & model		Perkins 1100 Series (1104C-44) diesel naturally-aspirated	
Cylinders		4	
Engine output (gross power)		83 hp @ 2200 rpm	
Peak torque		223 ft·lbs @ 1400 rpm	
Transmission type (optional)		4-speed fully automatic powershift	

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

— All Sellick forklifts meet or exceed all ANSI B56.6 safety standards. —



Sellick Equipment Limited • P.O. Box 1000/358 Erie Street North • Harrow, Ontario, Canada • NOR 1G0 • 519-738-2255 • sellick@mnsi.net